


Tensioning Tool (Strong) Manual

1



Insert the band into the buckle. The buckle teeth shall be in the direction of the operator with the ears faced up. Bend end of band under buckle.

2



Place band in opening of tool nose and gripper Block. Push the "tool nose" against the buckle.

3




Place your finger between the buckle ears. Tighten band clamp by turning the tension handle clockwise.

4



When reaching the desired tension, turn the tool over the buckle. This movement will increase the band tension.

5

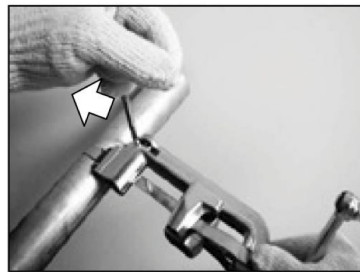

Rotate cutting handle forward to cut the band.

6



Remove tool, holding stub of band down.

7



Hammer down buckle ears to complete the application.